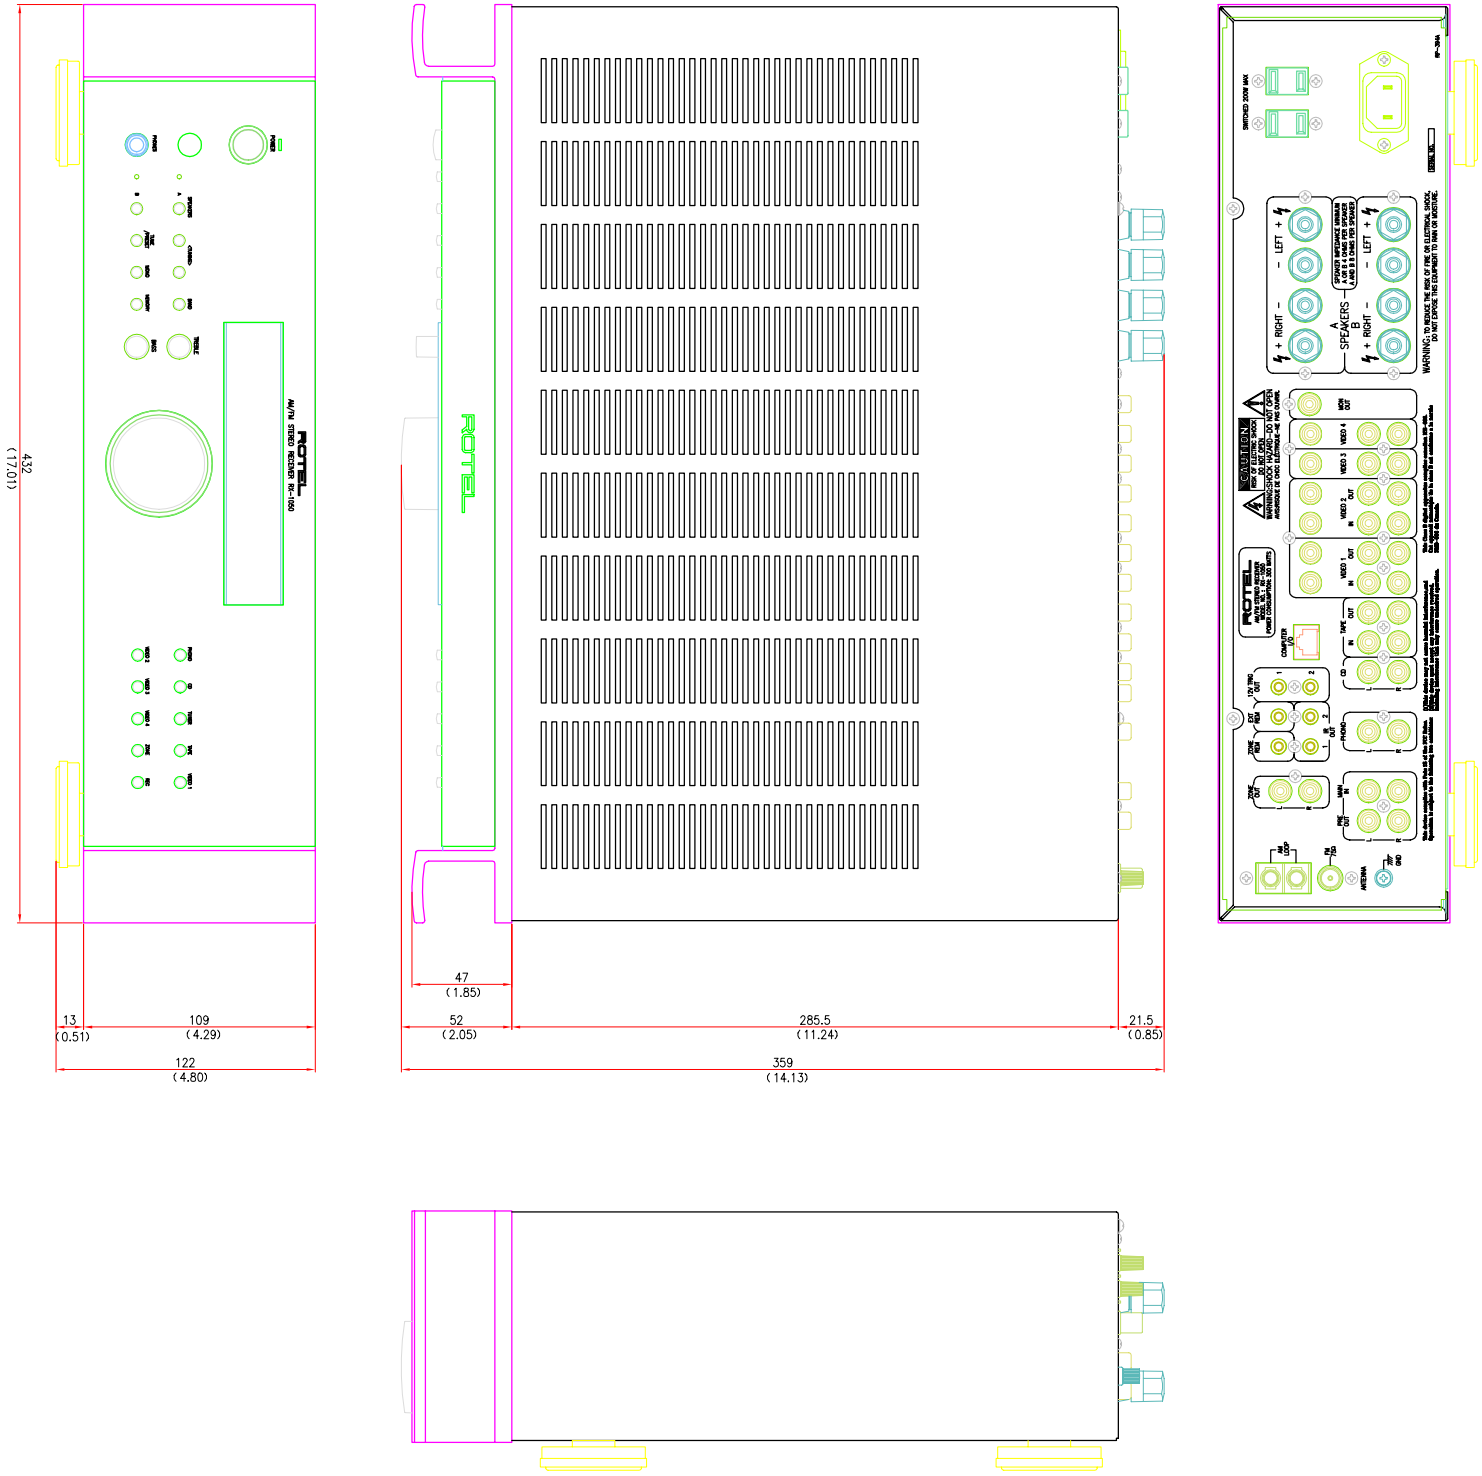
RT-30A
SWITCHED 300W MAX
SERIAL NO.
SPEAKERS
- LEFT +
+ RIGHT -
SPEAKER IMPEDANCE MINIMUM
4 OHMS PER SPEAKER
A MIN 8 OHMS PER SPEAKER
CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN
WARNING:TO REDUCE THE RISK OF FIRE OR ELECTRICAL SHOCK,
DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE.
MON OUT
VIDEO 4
VIDEO 3
VIDEO 2 OUT
IN
VIDEO 1 OUT
IN
DVD OUT
IN
CD
IN
COMPUTER I/O
TAPE 2 OUT
IN
TAPE 1 OUT
IN
PHONES
PRE OUT
MAIN IN
AM
FM 75Ω
ANTENNA
AM GND
ROTEL
AM/FM STEREO RECEIVER
POWER SUPPLY: AC 230V 50Hz
CONSOMMATION: 300 WATTS
ROTEL
AM/FM STEREO RECEIVER RC-1060
ROTEL
432
(17.01)
13
(0.51)
109
(4.29)
122
(4.80)
47
(1.85)
52
(2.05)
285.5
(11.24)
21.5
(0.85)
359
(14.13)