DOUBLE INSULATION- When servicing use only identical replacement parts
SPEAKER IMPEDANCE A OR B - 4OHMS MINIMUM A AND B - 8OHMS MINIMUM
CLASS 2 WIRING
ESSENTIALS
RP-588
CAUTION- DISCONNECT SUPPLY CORD BEFORE REPLACING FUSE. REPLACE WITH SAME TYPE FUSE:
ATTENTION- DEBRANCHER AVANT DE REMPLACER LE FUSIBLE UTILISER UN FUSIBLE DE RECHANGE DE MEME TYPE
CAUTION
RISK OF ELECTRIC SHOCK DO NOT OPEN
WARNING- CHOC - RISQUE DE NE PAS OUVRIR
AVIS- RISQUE DE CHOC ELECTRIQUE-NE PAS OUVRIR
GND
PHONO L R
CD
TUNER
AUX
MONO SUB OUT
PRE OUT L R
MONO L R
BALANCED IN RIGHT LEFT
RS232
BLUETOOTH
DIGITAL IN 1 2 3
NETWORK
PC-USB
ROTEL LINK IN OUT
REM IN
EXT 12V TRIG OUT IN 1 2
SPEAKER A + RIGHT - + LEFT -
SPEAKER B + RIGHT - + LEFT -
~
INTEGRATED AMPLIFIER
MODEL NO. RA-1592MKII
POWER CONSUMPTION : 800W
ROTEL

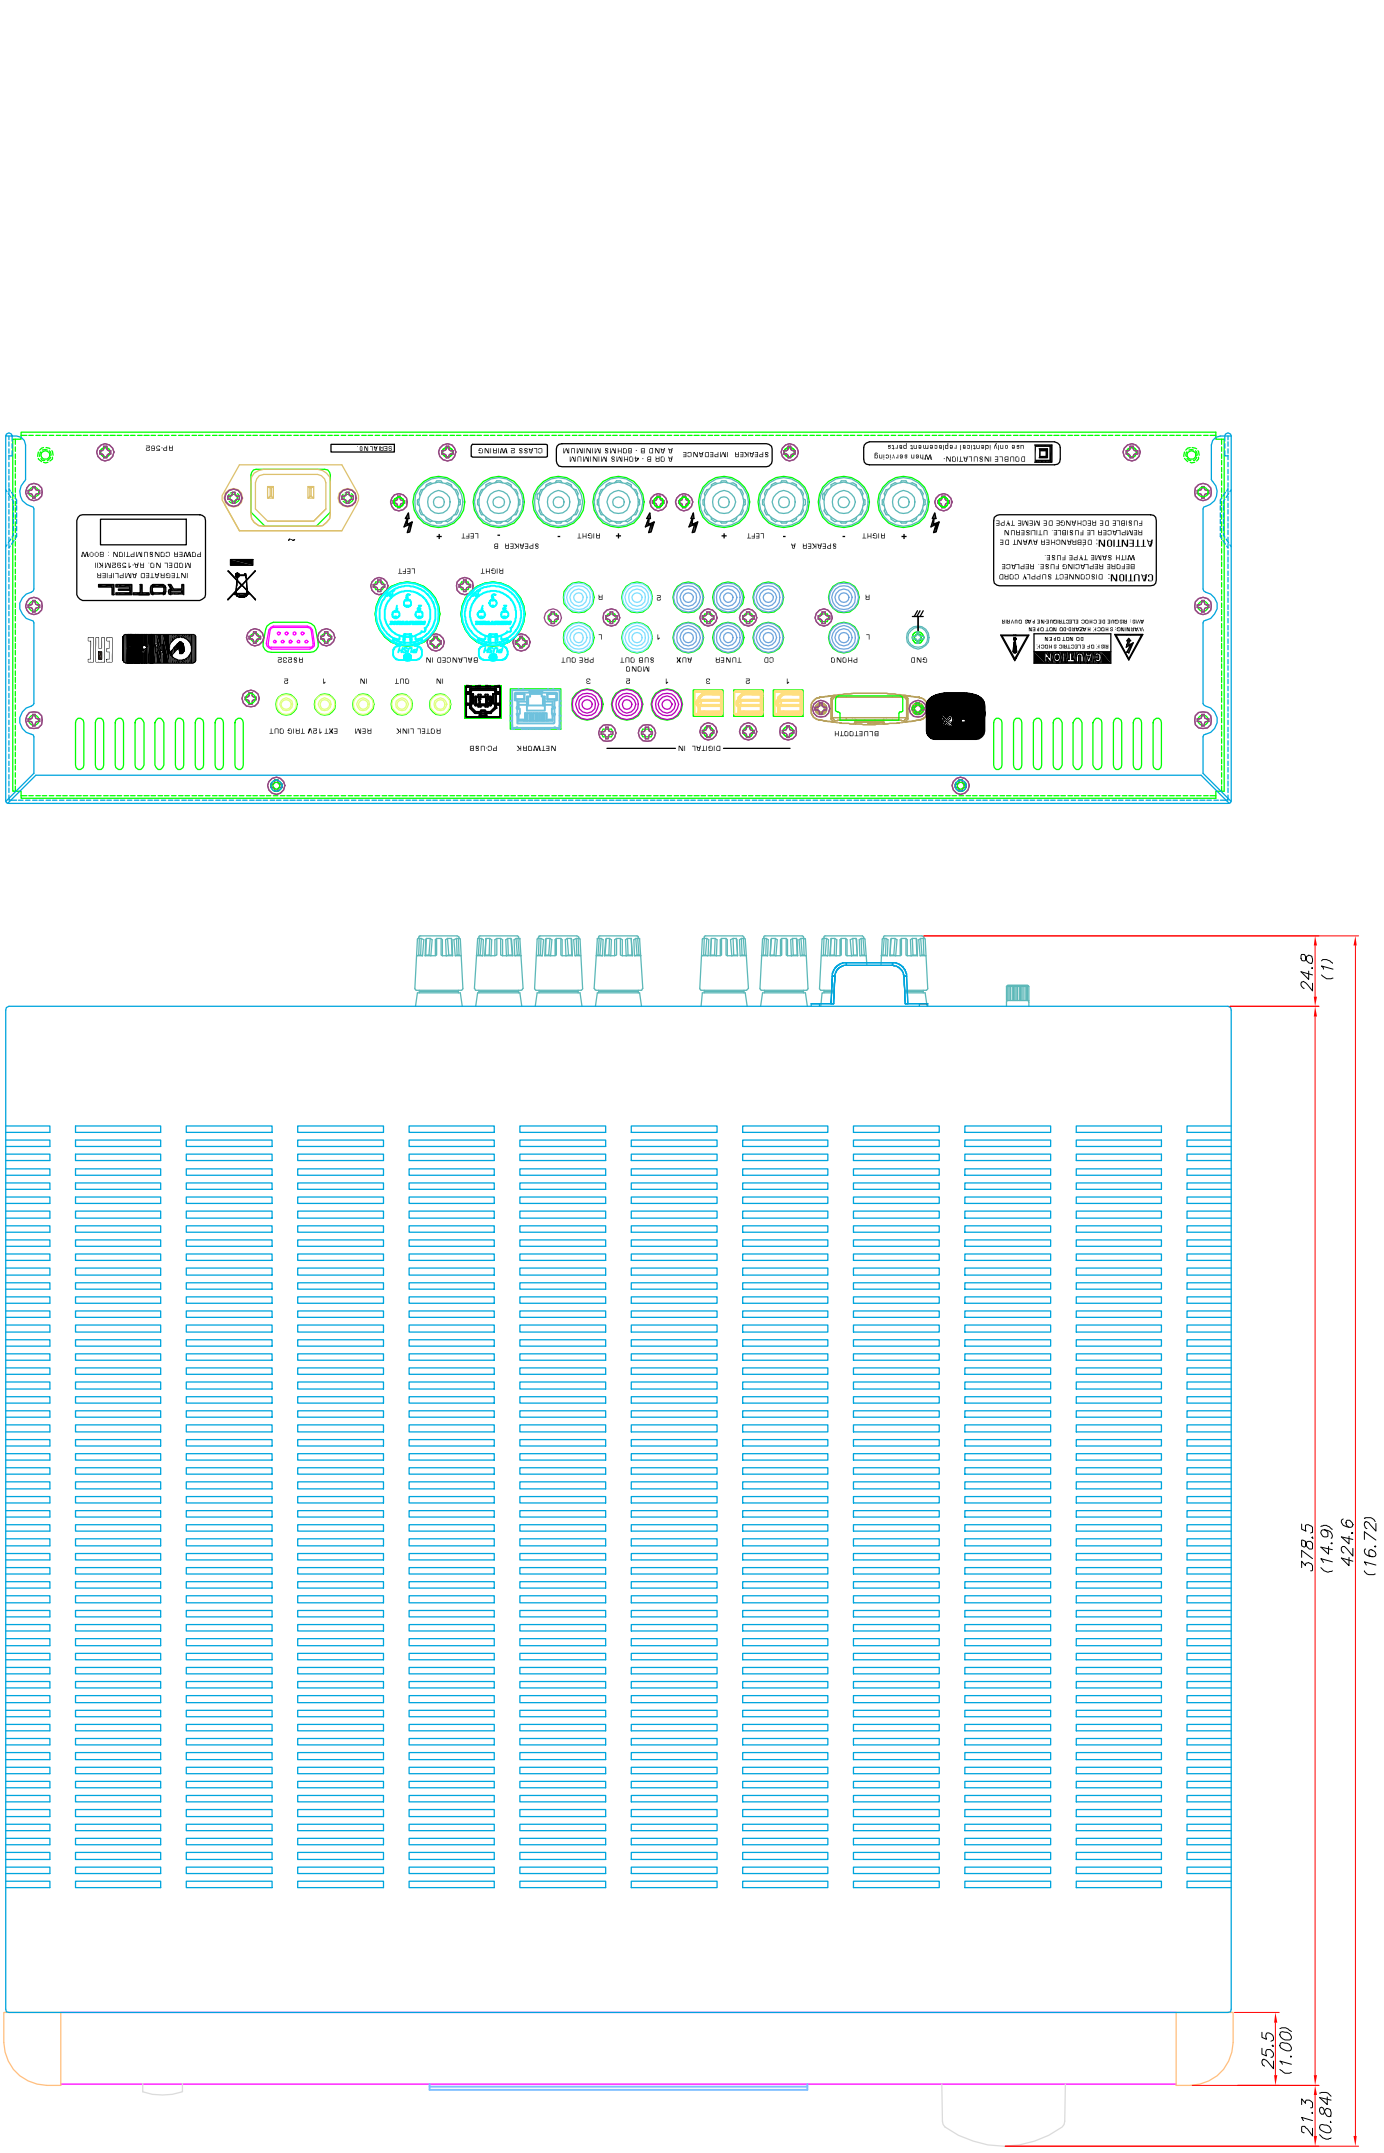
24.8
(1)
378.5
(14.9)
424.6
(16.72)
25.5
(1.00)
21.3
(0.84)

ROTEL
RA-1592MKII
POWER
PHONES
SPEAKERS A B
PHONO CD XLR TUNER AUX PC-USB USB
OPT 1 OPT 2 OPT 3 COAX 1 COAX 2 COAX 3 BT
MENU - + ENTER
132.6
(5.22)
143.8
(5.66)
11.2
(0.44)
431
(16.97)