SPECIFICATION

AB Class AB amplifier design	Wireless aptX™ HD and AAC Bluetooth	ESS premium 32-bit Digital to Analog Converter	Includes remote control

	RAS-5000	S14
Power Output	220 Watts / ch (4 Ohms)	150 Watts / ch (4 Ohms)
	140 Watts / ch (8 Ohms)	80 Watts / ch (8 Ohms)
Total Harmonic Distortion	< 0.03%	< 0.04%
Intermodulation Distortion (60 Hz : 7kHz, 4:1)	< 0.03%	< 0.03%
Analog Section		
Frequency Response	10 Hz - 100k Hz, ± 0.5 dB,	10 Hz - 100k Hz, 0 ± 0.5 dB
Input Sensitivity / Impedance	0.78 V / 46k Ohms	200 mV / 47k Ohms
Tone Controls - Bass / Treble	± 10 dB at 100 Hz / 10k Hz	± 10 dB at 100 Hz / 10k Hz
Signal to Noise Ratio (IHF A-weighted)	103 dB	100 dB
Digital Section		
Frequency Response	10 Hz – 70k Hz, (±3 dB, Max)	10 Hz - 90k Hz (0 ± 2 dB, Max)
Signal to Noise Ratio (IHF A-weighted)	105 dB	98 dB
Input Sensitivity/Impedance	-8 dBFS / 75 Ohms	-20 dBfs / 75 Ohms
Digital Inputs	COAX / OPTICAL (up to 24-bit / 192k Hz)	COAX / OPTICAL (up to 24-bit / 192k Hz)
PC-USB	PCM (up to 24-bit / 384k Hz)*	PCM (up to 24-bit / 384k Hz)*
	MQA and MQA Studio (up to 24-bit / 384k Hz)	MQA and MQA Studio (up to 24-bit / 384k Hz)
	Roon Ready	Roon Ready
HDMI	Support eARC function	
Power Consumption	380 Watts	280 Watts
Dimensions (W x H x D)	431 x 144 x 425 mm	430 x 93 x 345 mm
	17 x 5 $\frac{7}{8}$ x 16 ins	17 x 3 $\frac{5}{8}$ x 13 $\frac{1}{2}$ ins
Front Panel Height	3U / 132.6 mm / 5 $\frac{1}{4}$ ins	80 mm / 3 $\frac{1}{8}$ ins
Weight (net)	15.7 kg, 34.6 lbs.	9.15 kg, 20.17 lbs.
Finish	Black and Silver	Black and Silver

Visit www.rotel.com to find an authorized Rotel dealer.

The APP can be downloaded by scanning the QR code below:

For Android™	For iOS

Follow us:

www.rotel.com

www.instagram.com/rotelhifi/

www.facebook.com/rotelhifiusa/

www.youtube.com/c/rotelhifiaudio/

ROTEL

ALL-IN-ONE MUSIC SOLUTIONS
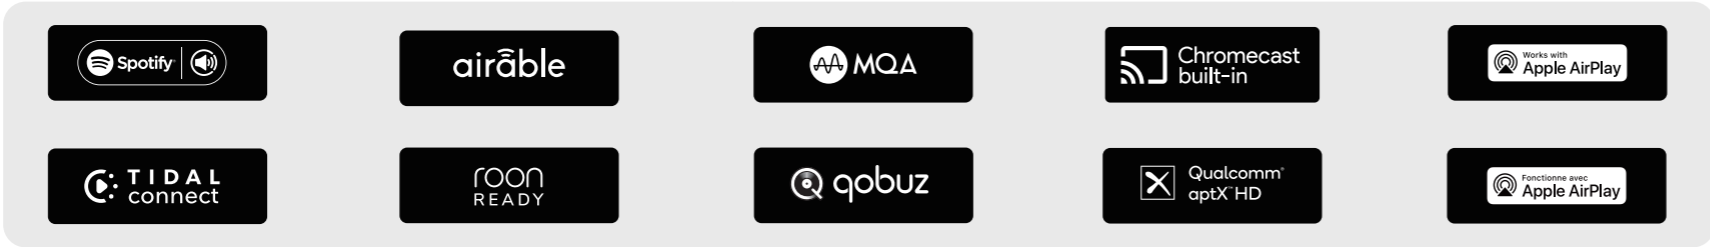
RAS-5000

Simplicity and performance meet in the Rotel RAS-5000 designed to effortlessly fit into your lifestyle and elevate your entertainment experience. Stream your favorite music from Spotify Connect, Tidal Connect, Internet Radio, or any service available on your computer, tablet, or mobile device via Airplay 2, Google Cast or Roon. Traditional sources are also supported using the analog, digital, aptX™ HD Bluetooth and PC-USB input connections. The rear USB also supports flash memory or an attached hard drive.


The HDMI ARC (Audio Return Channel) connection ensures dynamic, high resolution sound for your favorite live sports, TV shows, movies, and games directly from your TV powering 220 watts of Class AB output into 4 ohms.

Enhance and simplify your home entertainment experience without compromise today with the Rotel RAS-5000 and immerse yourself in sound.

S14

The Rotel S14 Integrated Network Streamer is an all-in-one solution providing convenient, intuitive access to the near limitless catalog of online music. High resolution audio including MQA from Tidal and Qobuz is rendered with detailed precision through a 32-bit ESS DAC delivering 150 Watts of Class AB power into 4 ohms.
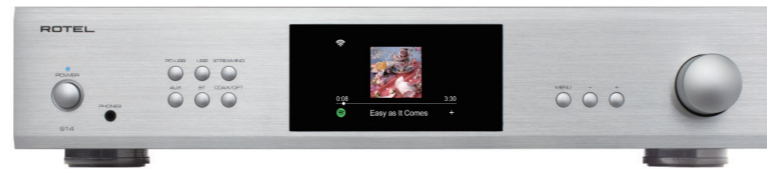
The front panel color display presents album artwork, track, and title information and simplifies the setup and configuration process using the included remote control. The S14 connects to both hard-wired and dual-band Wi-Fi networks for installation flexibility.

Use your favorite music player App or use the S14 App to access thousands of Internet Radio stations.

The S14 also includes Coaxial, Optical, Analog, PC-USB and aptX™ HD Bluetooth source inputs for legacy devices and even plays MP3, WMA and AAC files fromUSB attached hard drive or a a flash memory.

This just-add-speakers solution continues to deliver on the promise of quality, performance, and value synonymous with Rotel.